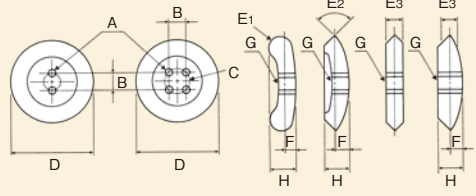

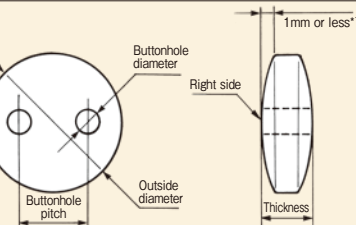
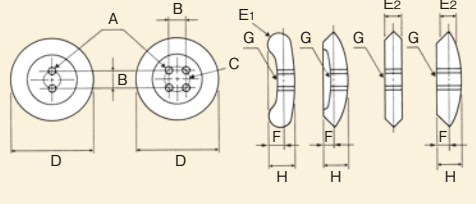


Applicable button requirements






Specifications for 4-holed and 2-holed buttons		
	A	Buttonhole diameter Needle: φ1.5mm or more when using #12~#16 Needle: φ2mm or more when using #12~#18
	B	Distance between buttonholes 1.5~6.0mm
	C	Buttonholes All holes must be located equidistant from the center of each button
	D	Outside diameter Min. φ8mm Max. φ32mm Line height within ±0.25mm
	E1	Button with a round edge R(roundness) of button edge must be a 3mm radius or less
	E2	Button with a V-shaped edge Within 120°angle
	E3	Button with an angular edge The thickness must be 5mm or less
	F	Bulge 5mm or less
	G	Area around buttonholes Must be smooth
	H	Thickness 8mm or less

Specifications for shank and marble buttons		
	A	Buttonhole diameter φ1.5mm or more
	B	Thickness 6.8mm or less
	C	Distance from the bottom of the button head to the center of the buttonhole Shank button: 1~6mm Marble button: 1.5mm or more
	D	Length of shank 8mm or less
	E	Straight section on the side of button 3.5mm or less
	F	Outside diameter Min φ8mm, Max. φ32mm
	G	Distance from the center of the hole to the button edge 2mm or less

Specifications for stay buttons					
	Type	Outside diameter	Buttonhole diameter	Buttonhole pitch	Thickness
	Type A	8.5mm	2.5mm	3.1mm	2.0mm
	Type B	10.2mm	3.2mm	4.0mm	2.0mm
	*1 Requires the use of stay buttons with a projection height of 1mm or less on the top. (commedable dimension)				

Specifications for counter buttons		
	A	Buttonhole diameter Needle: φ1.5mm or more when using #12~#16 Needle: φ2mm or more when using #12~#18
	B	Distance between buttonholes 2.0~5.0mm
	C	Buttonholes All holes must be located equidistant from the center of each button
	D	Outside diameter Min. φ8mm Max. φ25mm Line height within ±0.25mm
	E1	Button with a around edge R(roundness) of button edge must be a 2mm radius or less
	E2	Button with an angular edge The thickness must be 5mm or less
	F	Height of button edge 2mm or less
	G	Area around buttonholes Must be smooth
	H	Thickness 5mm or less

List of button carrier

For 4-holed button						For 2-holed button								
1			2			3			4			5		
														
Mark	Part No.	Dimension(mm)	Mark	Part No.	Dimension(mm)	Mark	Part No.	Dimension(mm)	Mark	Part No.	Dimension(mm)	Mark	Part No.	Dimension(mm)
A	17856600	a 2.0	D	17856907	a 2.8	K	17857608	a 4.0	M	17858002	a 2.0	U	17858705	a 4.0
		b 1.0			b 1.2			b 1.4			b 1.0			b 1.4
B	17856709	a 2.4	E	17857004	a 2.8	K1	17857707	a 4.0	N	17858101	a 2.4	V	17858804	a 4.2
		b 1.2			b 1.4			b 1.8			b 1.2			b 1.4
C	17856808	a 2.6	F	17857103	a 3.0	L	17857806	a 5.0	P	17858200	a 2.6	W	17858903	a 4.4
		b 1.2			b 1.2			b 1.8			b 1.2			b 1.4
			F1	17857202	a 3.0				Q	17858309	a 2.8			
					b 1.4						b 1.2			
			G	17857301	a 3.2				R	17858408	a 3.0			
					b 1.4						b 1.2			
			H	Standard 17857400	a 3.4				S	17858507	a 3.2			
					b 1.4						b 1.4			
			J	17857509	a 3.6				T	Standard 17858606	a 3.4			
					b 1.4						b 1.4			

Provided as standard

JUKI

AMB-289

Computer-controlled, High-speed, Single-thread Chainstitch, Button-neck-wrapping Machine



(Table stand is optionally available.)

AMB-289

The range of applicable buttons is further extended.

Specifications

Model name		AMB-289
Stitch type		Single-thread chainstitch
Sewing speed	Max. sewing speed	1,800sti/min (neck-wrapping), 1,200sti/min (button sewing)
	Normal sewing speed	1,500sti/min (neck-wrapping), 1,000sti/min (button sewing)
Application		Sewing of various button types (buttons to be sewn by machine)
Button size		Sewing button without neck-wrapping : φ8~φ38mm Sewing button with neck-wrapping : φ8~φ32mm Counter button : φ8~φ25mm
Display screen for setting basic shape-setting		Distance between buttonholes: 1.5~6.0mm (in increments of 0.1mm) Height of neck-wrap: 0, 1.5~10.0mm (in increments of 0.1mm) Number of cross-over stitches: 2~64 (in increments of 2)
Needle		ORGAN SM×332EXTLG-NY (standard needle), (at the time of delivery #14) #12~#18
Thread		SPUN / Cotton thread 500~170dtex (#60~#30CA)
Thread take-up		Needle thread take-up
Needle bar stroke		60.0mm
Needle throwing system		drived by Stepping motor
Feed system		drived by Stepping motor
Auto-lifter		drived by Stepping motor
Cloth feeding system		drived by Pneumatic
Thread trimming system		drived by Pneumatic
Thread tension adjustment		Active tension (Exclusive electronic thread tension control system)
Number of data that can be input		Max. 99 patterns
Number of cycle stitch patterns		The number of registered patterns: 20 (50 patterns for one cycle)
Operation panel		Color LCD touch panel: IP-420D
Button loader		Provided as standard
Product count		Provided as standard (up/down system)
Lubrication		No lubrication * Periodic greasing is required.
Power requirement and power consumption		Single-phase 200~240V, 3-phase 200~240V/400VA
Compressed air and air consumption		0.5MPa(5kgf/cm ²), 11dm ³ /min
Dimensions		600mm(W)×600mm(D)×400mm(H)
Weight		Machine head: 65kg, Control box: 13kg

**sti/min* stands for "Stitches per Minute."

★CompactFlash™ or CFA specification compatible media.

★CompactFlash™ is a registered trademark of SanDisk Corporation, U.S.A.

★Other company names and product names/brand names are trademarks or registered trademarks of the respective companies.

When you place orders

Please note when placing orders, that the model name should be written as follows:

[Machine head] AMB289

-IP

Option	Code
With a movable eye-guard	A
With a movable eye-guard Fully equipped with set-pins and carrier-pins	B

※We recommend "B"
※Packing Mass 0.32m³ 853mm(W)×603mm(D)×613mm(H) 69.3kg

● To order, please contact your nearest JUKI distributor.

[Control box] MC640

Power supply		Code
3-phase	200~240V	E
	200~240V	K
Single-phase	CE 200~240V (not provided with power switch)	N

※Packing Mass 0.1m³ 510mm(W)×460mm(D)×430mm(H) 18.0kg



Registered Organization : JUKI CORPORATION Head Office
The Scope of the Registration : The activities of research, development, design, sales, distribution, and maintenance services of industrial sewing machines, household sewing machines and industrial robots, etc., including sales and maintenance services of data entry systems.

JUKI

JUKI CORPORATION
SEWING MACHINERY & SYSTEMS BUSINESS UNIT


2-11-1, TSURUMAKI, TAMA-SHI,
TOKYO 206-8551, JAPAN
PHONE : (81) 42-357-2370
FAX : (81) 42-357-2274
http://www.juki.com

* Specifications and appearance are subject to change without prior notice for improvement.
* Read the instruction manual before putting the machine into service to ensure safety.
* This catalogue prints with environment-friendly soyink on recycle paper.

Options

Part No.	Description
40021446	Marking light asm.
40021447	Counter button B asm.
40020807	Counter button feed plate asm.

Button set pins (options)

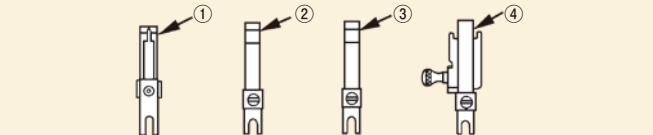

No.	Part No.	Description
1	17974056	For marble button
2	17974254	For shank button (φ1.5~φ2.0mm)
3	17974452	For shank button (φ2.0mm or more)
4	40023428	For metallic button

Options (assembly parts)

Part No.	Part name	Use
40020779	Tongue for knit (with a thread clamping function)	For preventing thread from twining at the beginning of sewing
40020766	Tongue stopper SS (1.7mm)	For light-weight materials
40020771	Tongue stopper T (6.0mm)	For heavy-weight materials
40020774	Tongue stopper guide D (6.0mm)	For knits
40020763	Tongue stopper guide	For tongue of AMB-189
40024296	Tongue stopper spacer B assembly	For light-weight materials
40024298	Tongue stopper spacer C assembly	For light-weight materials
40021017	Button clamp jaw attachment A for tucking and neck-wrapping	For tucking and neck-wrapping
40021014	Button clamp jaw attachment B for tucking and neck-wrapping	For tucking and flat-stitching
40021019	Tongue D	For preventing tongue from damaging fabrics
40021016	Tongue spacer	For adjusting tucking amount
40020815	Counter button feed plate B	For counter buttons
40020818	Counter button feed plate C	For 2-holed stay buttons
40020813	Counter button guide lever B	For thin buttons
40020821	Stay button clamp jaw lever (left)	For thin buttons
40020822	Stay button clamp jaw lever (right)	For thin buttons
40020832	Flat fabric clamp A (6.0mm)	For preventing fabric from flopping
40020833	Flat fabric clamp B (3.0mm)	For preventing fabric from flopping (for 2-holed buttons)

Grease



Part No.	Part name	Use
13525506	Grease tube	For gears ,cams
40013640	JUKI grease B	For worm gears
40006323	JUKI grease A	For the other moving points

AMB-289

The machine comes with an exclusive active-tension system ideal for the careful sewing of beautiful seams.

This single machine can also sew flat buttons, shank buttons, marble buttons and stay buttons (counter buttons).

- The stay button (counter button) sewing capability is a vital addition to the impressive application range of the AMB-289.
- Sewing methods and sewing shapes can be easily reset on the operation panel.
- In combination with the independent-drive needle-throwing method, the adoption of the Y-feed on the body side and X-Y feed on the button-sewing side enables the AMB-289 to sew patterns with variable numbers of buttonholes (such as four-holed front buttons and two-holed stay buttons).

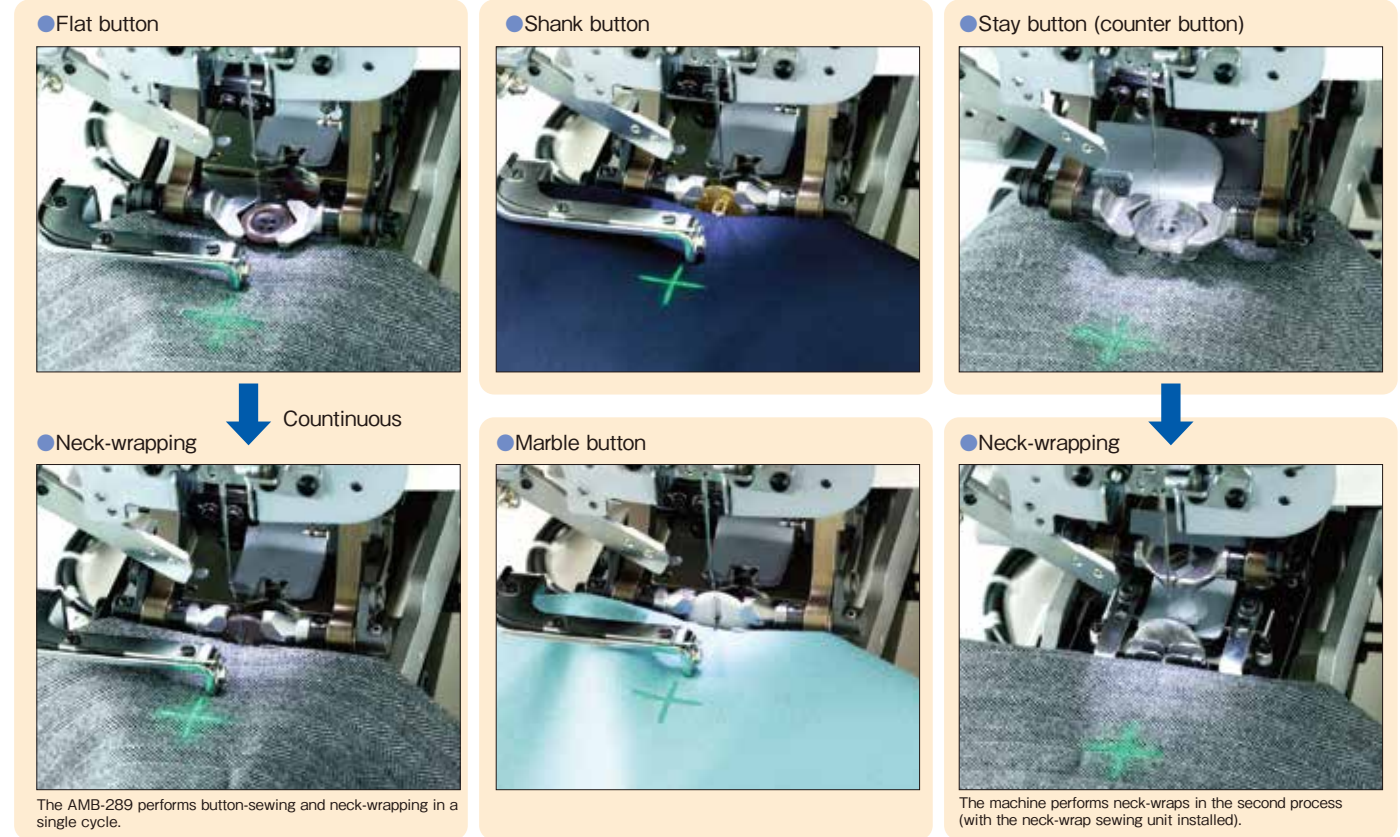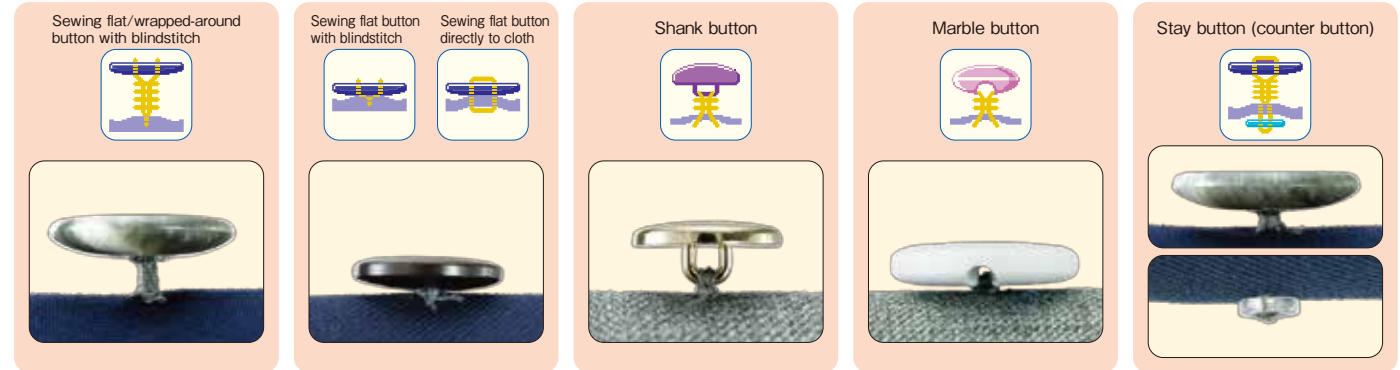

The cycle time has been reduced to bolster productivity.

- The sewing speed has been enhanced to dramatically increase productivity.
- As compared with manual button sewing, the AMB-289 achieves productivity as high as 5 times.

Comparison of productivity

(Condition) 4-holed button sewing
Button sewing: 8 stitches × 2
Neck wraps: 10 stitches
Hours of work: 8 hours
Allowance rate: 25 %

AMB-289

Normal sewing speed

Button sewing speed 1,000sti/min
Neck wraps speed 1,500sti/min

Conventional machine AMB-189NR

Button sewing speed 740sti/min
Neck wraps speed 740sti/min

Manual button sewing

The number of buttons to be sewn / 8h
1,986 pieces
Cycle time 7.6 sec/1 piece+Material picking/placing action: 4 sec


The number of buttons to be sewn / 8h
1,704 pieces
Cycle time 9.5 sec/1 piece+Material picking/placing action: 4 sec

The number of buttons to be sewn / 8h
417 pieces
Cycle time 55 sec/1 piece (including the material picking/placing action)


The AMB-289 promises upgraded-quality neck-wrapping.

- The AMB-289 finishes four-holed buttons with a hand-stitched appearance (V-shape stitching) by fixing the tucking position at a preset location. This results in the sewing of a neat seam on the wrong side of the garment and neck-wrap knots at a single location. Seam quality is further enhanced as a result.

AMB-289 (V-shape stitching)





Conventional machine



- The neck-wrap data can be finely adjusted via the entry screen of the operation panel to enhance the sewing quality. The distribution of neck wraps on the upper and lower parts of the button neck, a crucial point in determining the quality of neck-wrapping, can be adjusted to prevent buttons and button necks from becoming unstable and tilting.

- The neck-wrapping height can be adjusted by up to 10mm.

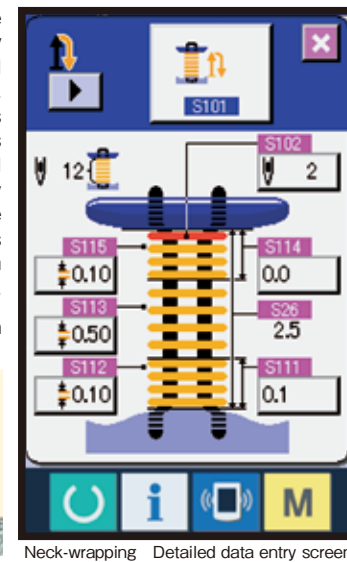

Exclusive active tension (electronic thread tension control system)

- The exclusive active tension system for AMB289 further improves responsiveness and allows delicate tension setting when the user changes fabrics.
- Thread tensions for button sewing and neck wrapping can be separately set on the operation panel.
- The machine stores sewing conditions in memory on a pattern-by-pattern basis. Required sewing conditions can be exactly reproduced for every pattern.




Superb functions for improving seam quality



- The remaining length of needle thread can be adjusted according to the type of material or thread to be used. It effectively prevents thread from slipping off the material at the start of sewing.
- The AMB-289 does not require the use of exclusive thread intended for button sewing. General-purpose cotton threads and spun threads are both applicable, depending on the type of material. A full range of thread counts from 500~170dtex (#60~#30CA) can be applied. This ensures use for diverse processes.
- The thread-trimming position is set to reduce the remaining length of thread on the material to a minimum.
- The machine incorporates a thread-fray prevention function that ensures the tying of strong and reliable knots at the last stitch.
- The number of stay stitches, which increases strength of button sewing stitches, can be set on the operation panel within the range of 0 and 3 stitches.
- The tucking depth is increased to 5mm to ensure a consistent tucking depth in soft materials such as knits.
- The feed accuracies are high as 0.05mm (some points are 0.1mm). This promises an accurate needle entry position and tucking depth.

Cycle sewing


- The machine sews buttons on a double-breast suit, a garment that requires the sewing of different types of buttons, in a continuous manner.
- Cycle sewing data can be set/edited with the sewing item graphically displayed on the operation panel (the number of buttons, button sewing locations, and sewing order of buttons).
- The button loader can feed two types of buttons in a single sewing cycle.

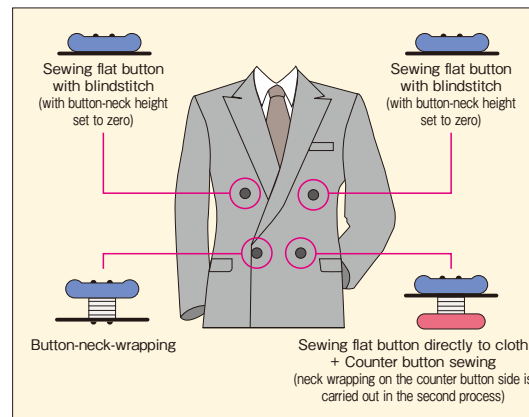

Example of combination of button carriers

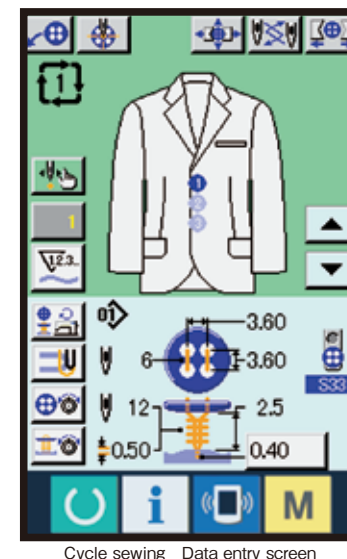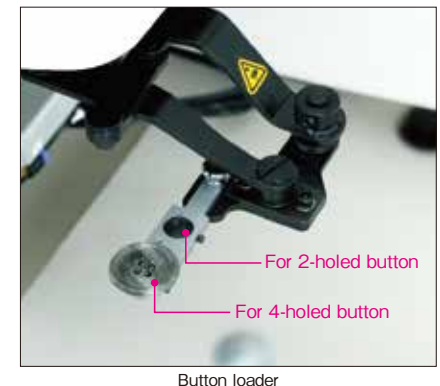

Configuration

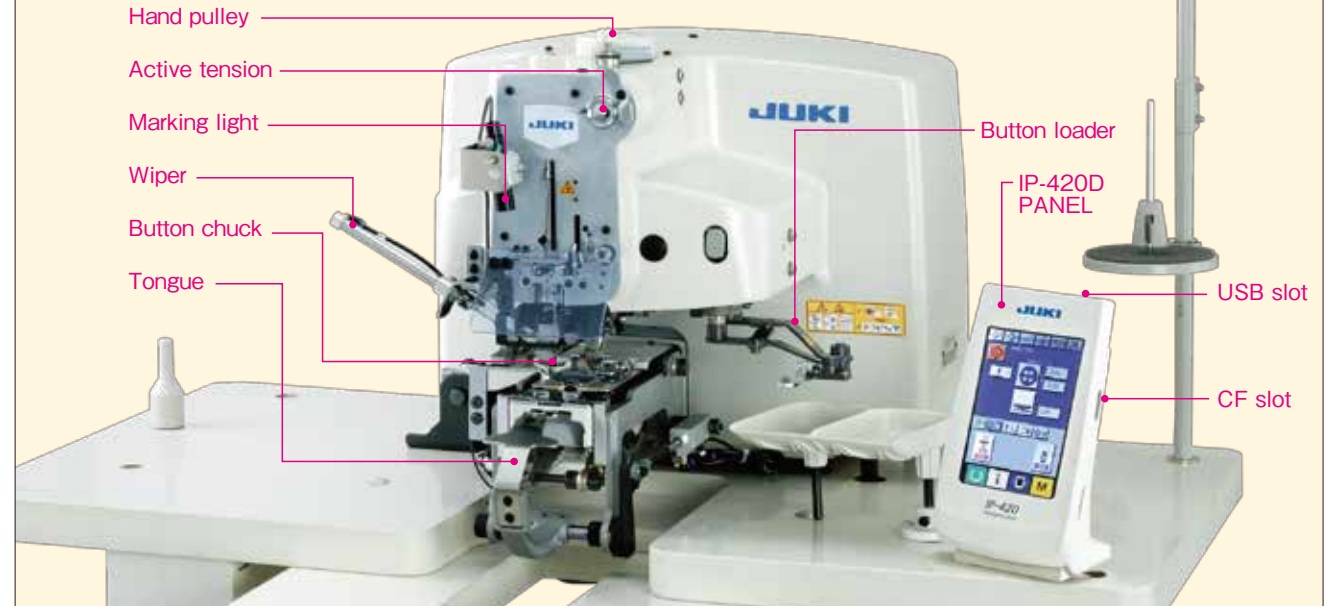

The machine comes with new functions to improve workability.

Dramatically reduced oil stains

- As the machine requires no lubrication, oil spatters and all other lubrication-related troubles are eliminated. Sewn garments have dramatically fewer oil stains as a result.


*Periodical greasing is required for some of the mechanical structures.

Dramatically reduced vibration and noise

- The adoption of the needle-throwing mechanism dramatically reduces the vibration and noise usually produced during the neck-wrapping procedure.

The machine is provided as standard with a button loader.

- The machine is provided as standard with a button feeder that lets the operator place the next buttons to be sewn during overlapping-style work.
- The button-delivery position between the button loader and button chuck can be easily adjusted on the operation panel. No tools are required.

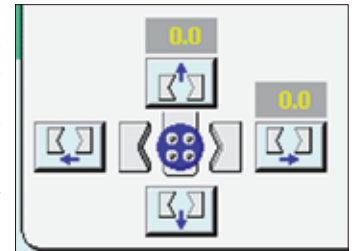

Setting of longitudinal and lateral adjustments of button chuck.

LED now adopted

- The AMB-289 is provided as standard with an LED-type handy light and marking light. The sewing area is now brighter and more viewable than it would be under the incandescent light of a conventional machine. LED light also offer the advantage of a longer service life. The machine is optionally provided with a marking light for sewing flat buttons directly to cloth.

Convenient hand pulley

- The hand pulley is mounted on the top of head. This makes it easy to check the needle entry point.

The button loader gauge for the conventional model can also be used with the AMB-289.

- The set pins and four-holed and two-holed button carriers used with the AMB-189NR (the conventional model provided with a button loader) can also be used with the AMB-289.

*The AMB-289 requires dedicated set pins for shank buttons, marble buttons, and metallic buttons (optional).


Safety design

- The safety-first design makes it impossible to start the machine without buttons set on the button chuck.
- If the machine head tilts while the power ON, the safety switch automatically shuts down the machine even when the pedal or knee switch is pressed.

The color panel IP-420D provides excellent operability.

- The operation panel is a touch-sensitive type LCD. The clear graphical displays make it much easier for the operator to set or modify sewing data.

- A CompactFlash™ card can be used to store and transfer sewing data. This makes it possible for sewing machines at one or more factories to share data. In addition to the CompactFlash™, the machine is provided as standard with a USB connector. As a result, the use of a USB flash drive or card reader enables the storage and transmission of sewing data by means of various kinds of media (such as a floppy disk, SmartMedia, CompactFlash and SD card) to enable sewing using the same sewing data among sewing machines in a plant or among subcontract plants.

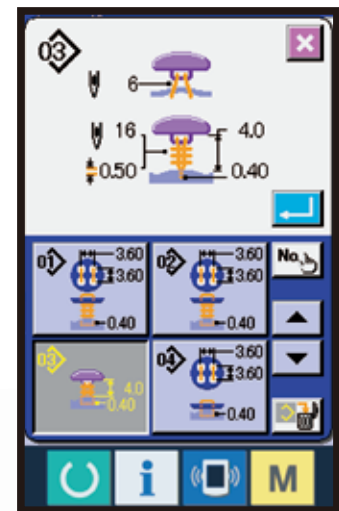

Shank buttons Data selection screen



Caution! Special order pattern